

# Ihre Konfiguration



## Ihr Konfigurationscode lautet

M1 . P . 0 . 3 . 0 . 0 . 3 . 3

Die Übermittlung des Konfigurationscodes ist sowohl in der Angebots- als auch in der Auftragsphase eine wichtige Information zur Identifikation Ihrer gewünschten Variante.

## Auswahl

|                         |       |
|-------------------------|-------|
| Gehäuselänge [mm]       | 200.5 |
| Gehäusedurchmesser [mm] | 120   |


## Technische Daten

| Bezeichnung                 | Ø<br>90mm   | Ø<br>140mm |
|-----------------------------|-------------|------------|
| Durchschn. Drehzahl [min-1] | 200         | 150        |
| Max. Drehzahl [min-1]       | 400         | 300        |
| Schutzklasse nach IEC 60529 | IP 50       |            |
| Betriebstemperatur [°C]     | -20 bis +70 |            |
| Lebensdauer bis zu [Mio. U] | 50          |            |
| Strombelastung [A]          | Max. 63     |            |
| Spannungsbelastung [V AC]   | Max. 630    |            |
| Kabellänge Rotor [m]        | 3           |            |
| Kabellänge Stator [m]       | 3           |            |
| Gesamtgewicht [Kg]          | 2.2         |            |

| Anzahl | Name                          | Beschreibung                                    | Breite | V  | A | Wege         |
|--------|-------------------------------|-------------------------------------------------|--------|----|---|--------------|
| 1      | Massebahn Dummy               | Wird anstelle eines PE-Weges eingesetzt         | 1      |    | 0 | 1            |
| 1      | Funktionseinheit P (Ethernet) |                                                 | 1      | 30 | 3 | Ethernet + 4 |
| 1      | Dummy Modul                   | Dummy Modul für die Belegung von freien Plätzen | 1      |    | 0 | 0            |

| Position | Name                                                   | Breite | V | A | Wege    |
|----------|--------------------------------------------------------|--------|---|---|---------|
| Vorne    | Mediendrehdurchführung 1/4" (1-Kanal) + Montageflansch |        | 0 | 0 | 1-Kanal |

Stromlaufplan

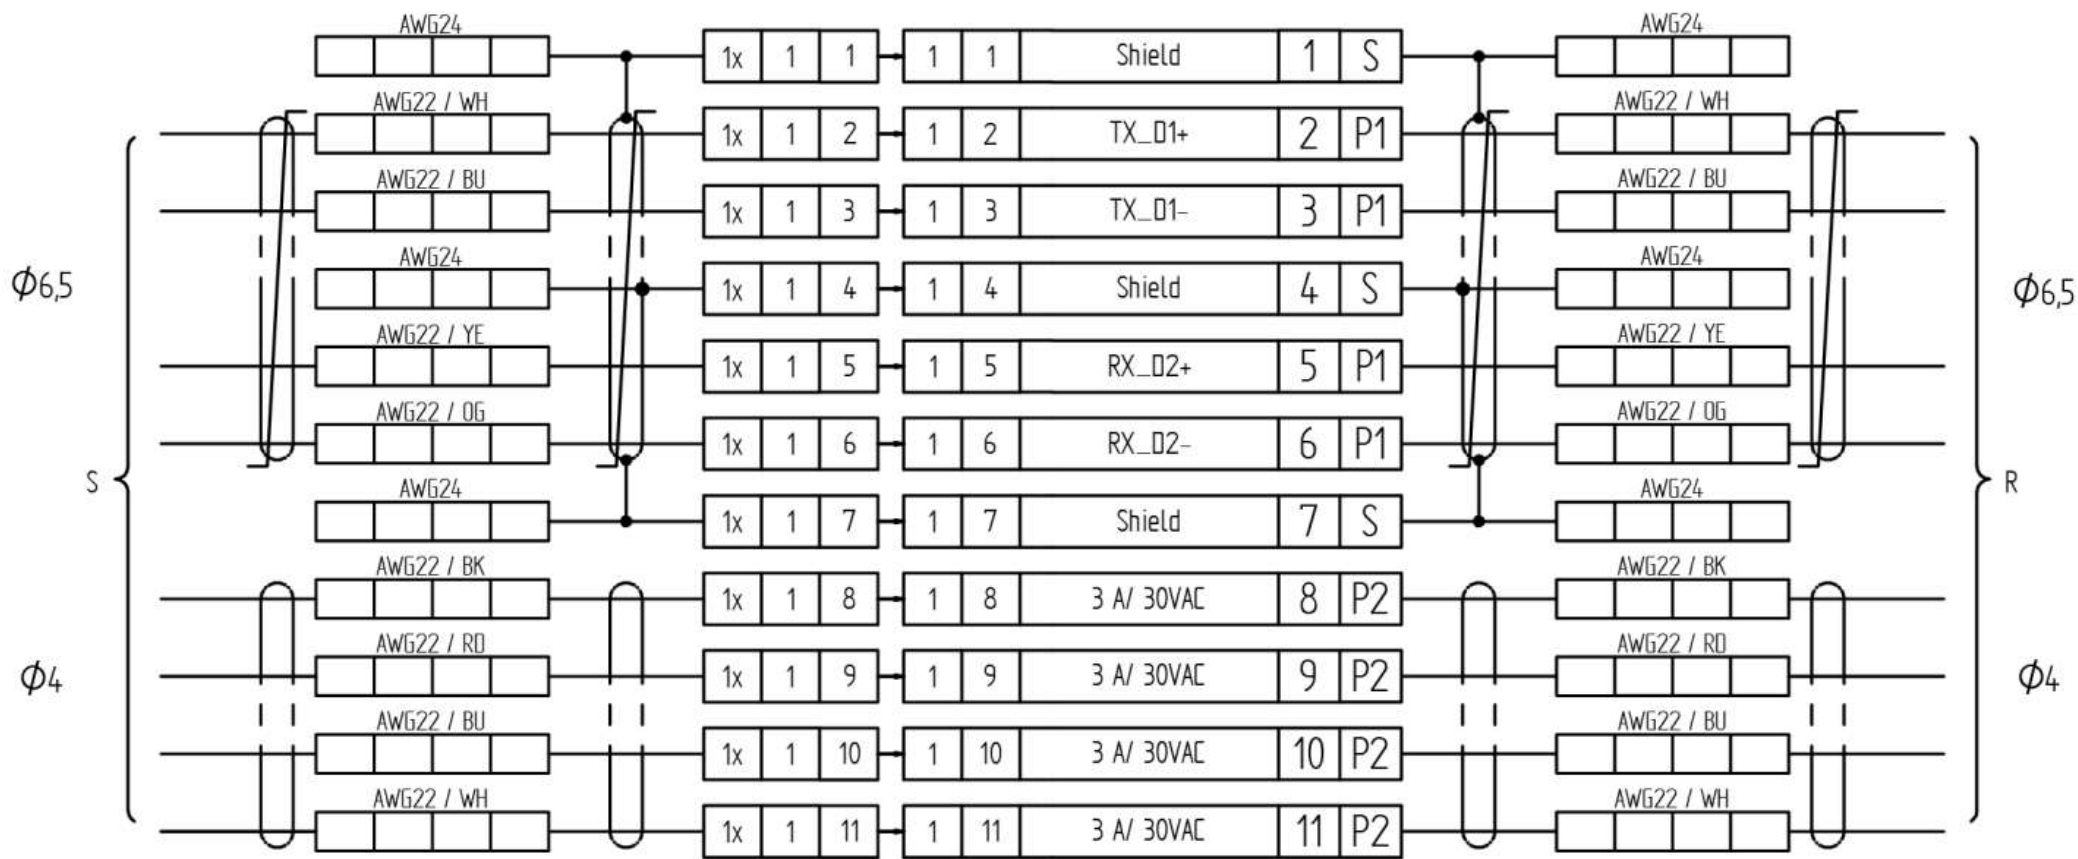

All drawings are the property of Schöfberger Güter Germany and are to be treated as confidential. Their reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. Rights reserved in the event of the onset of a subject matter model as design.

