
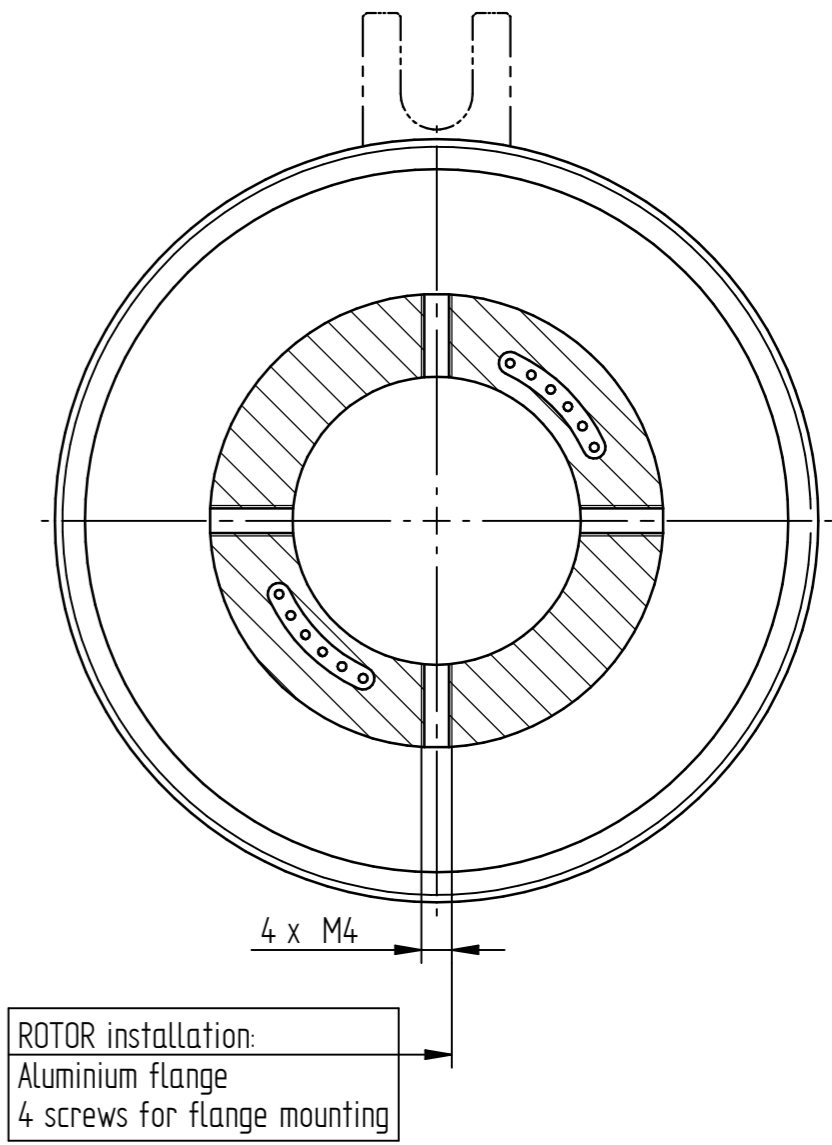


STATOR installation:
Anti-rotation tab to be mounted optionally, see manual
Anti-rotation tab is enclosed in the packaging

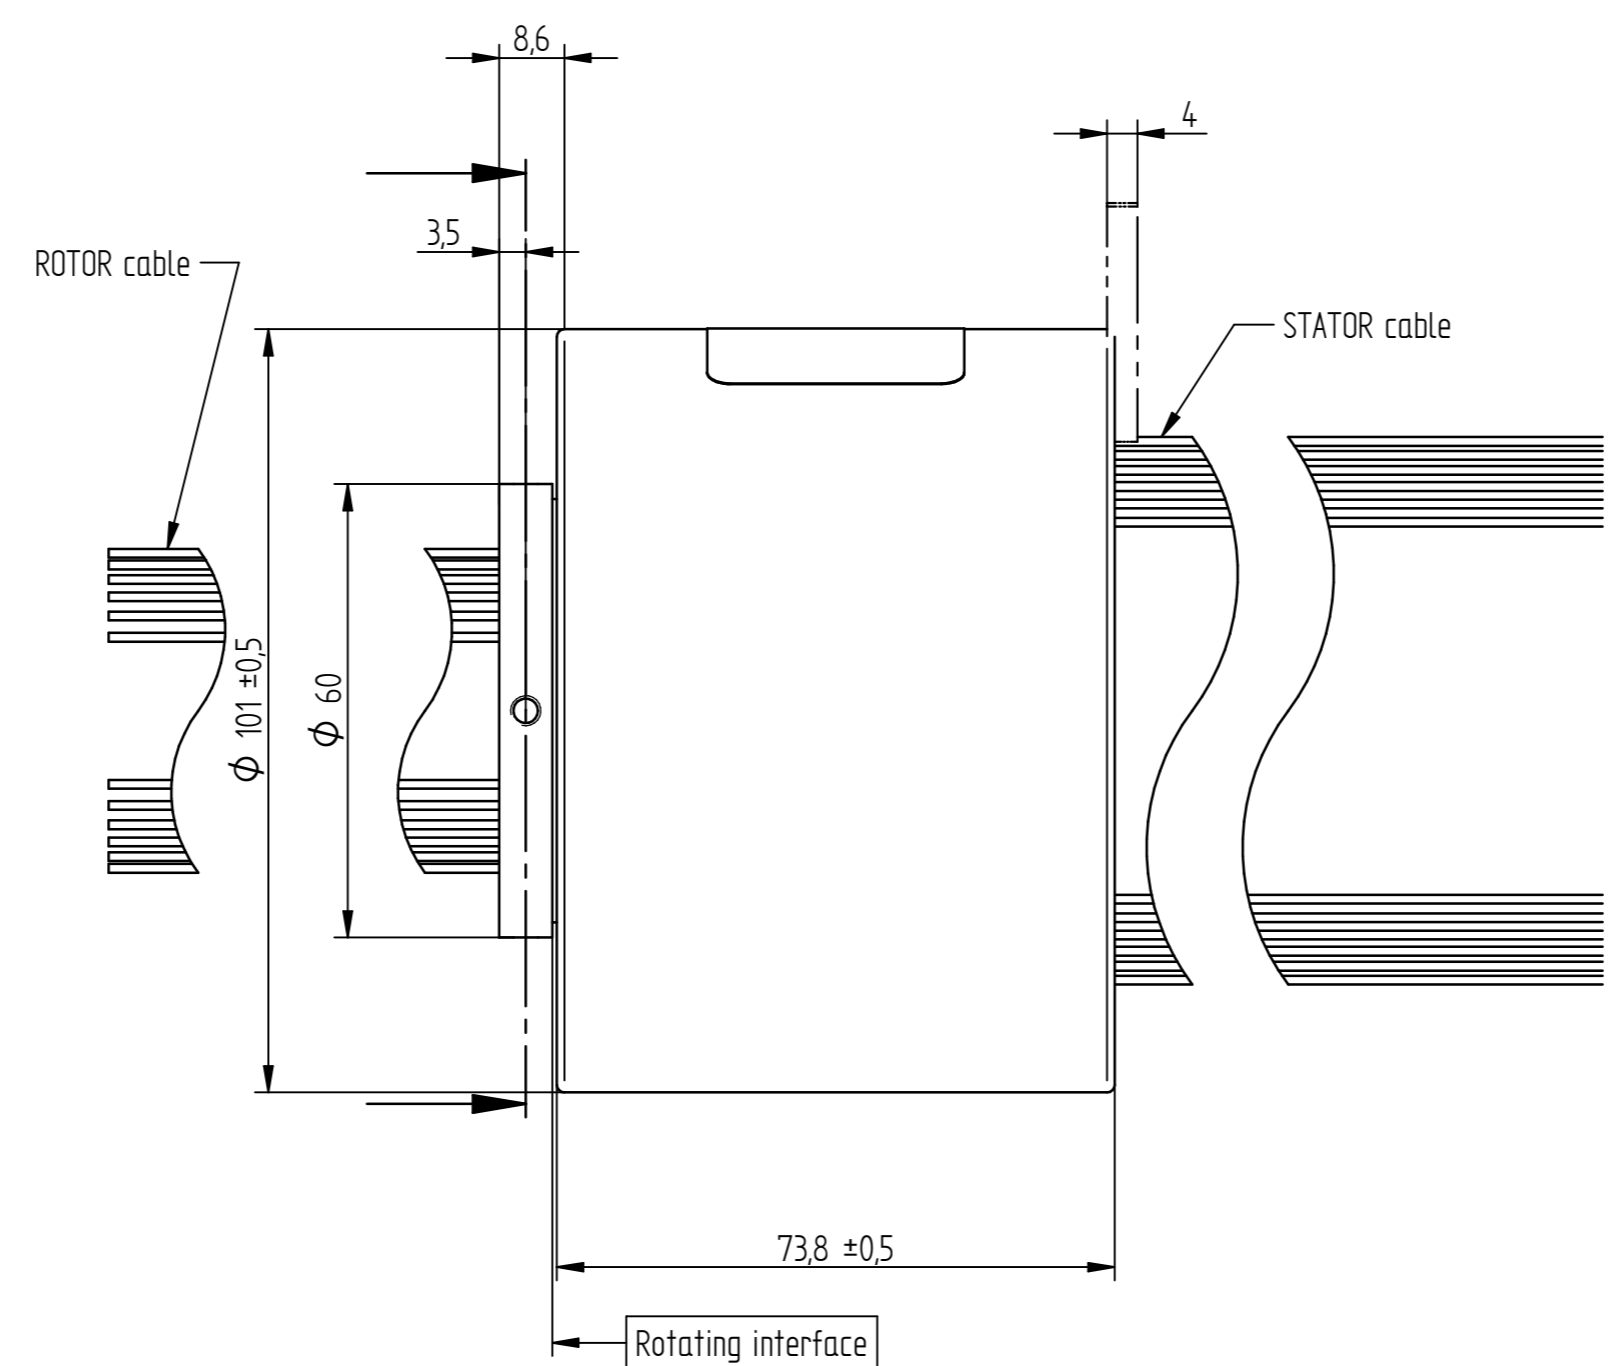

Wiring diagram see sheet 2

Die Montageanleitung 7BC000000 wird elektronisch bereitgestellt.
The assembly instruction 7BC000000 is provided in electronic format.





ELECTRONIC & ELECTRIC		MECHANICAL	
Rating Voltage	250 V AC / DC or 400 V AC	Working Speed	300 rpm max.
Current	10 A	Inner Diameter	Ø 38,1
		Contact Material	Precious Metals
Track	12	Lead Wire Length	STATOR: 250 mm ROTOR: 250 mm
Insulation Resistance	500 MΩ @ 500 V DC		
ENVIRONMENT		REMARKS	
Working Temperature	-20 °C to +60 °C	Application	see Manual
Working Humidity	≤ 60 % RH	Other	/
Protection Class	IP50	Note:	/

10	1	70C000032	Maverick Schleifring 12-Weg 10A		
Pos.	Anz.	Mat.Nr.	Kurztext	GroÙe/Abmessung	Werkstoff
1	2	3	4	5	6
DIN ISO 5456-2	TOLERANCES	DIN ISO 13715	FINISH	SCALE	REFERENCE 2
	ISO 2768 - mH	+0,3 +0,1	-0,1 -0,3	1:1	WEIGHT 0,001 kg
STANDARDS	DWG NO	REVISION	FIRST RELEASE	22.12.2021	
ISO 8015 ISO 14405	77C000032	A1	DESIGNER	CREITER	18.11.2022
SCHLEIFRING			APPROVED	AGREPPMAYR	21.11.2022
Beschreibung			CHANGE NO	200120151	
Maverick Schleifring 12-Weg 10A			DESCRIPTION	Maverick Slip Ring 12-Track 10A	
SIZE/DIM			DOCUMENT TYPE	Kundenzeichnung	
Drafft: 1000954681/D02/000/03			Modell:	1000954681/D00/000/03	
					A2

All drawings are the property of Schleifring GmbH Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

All drawings are the property of Schleifring GmbH/ Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Cable Table	
Current	Cable
5 A / Signal	AWG17
10 A	
15 A	AWG14

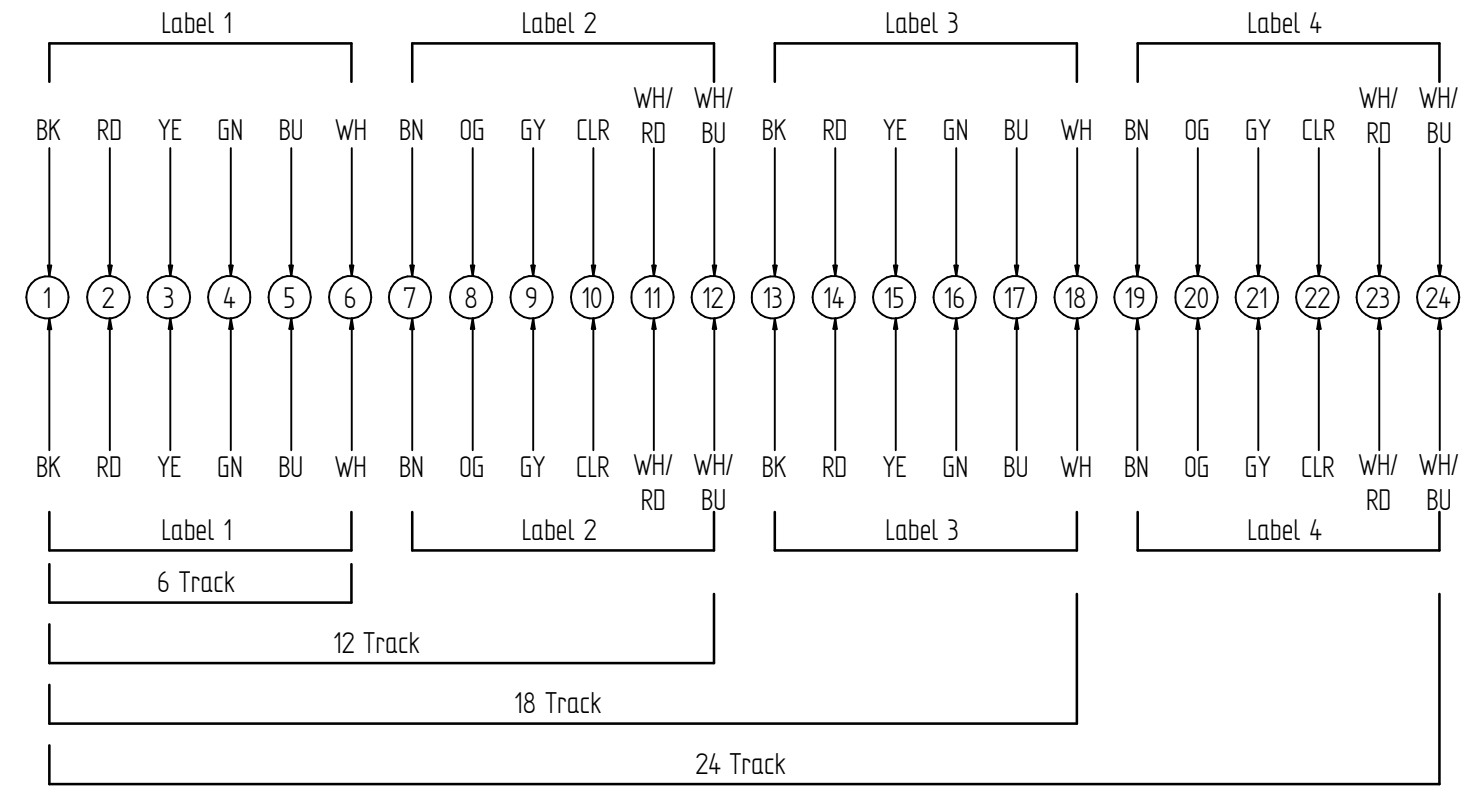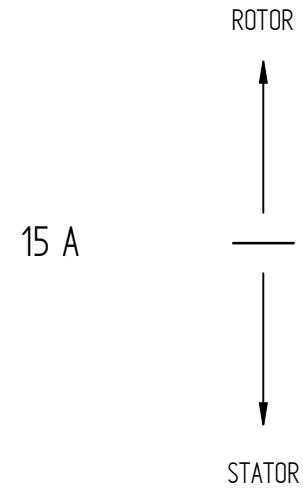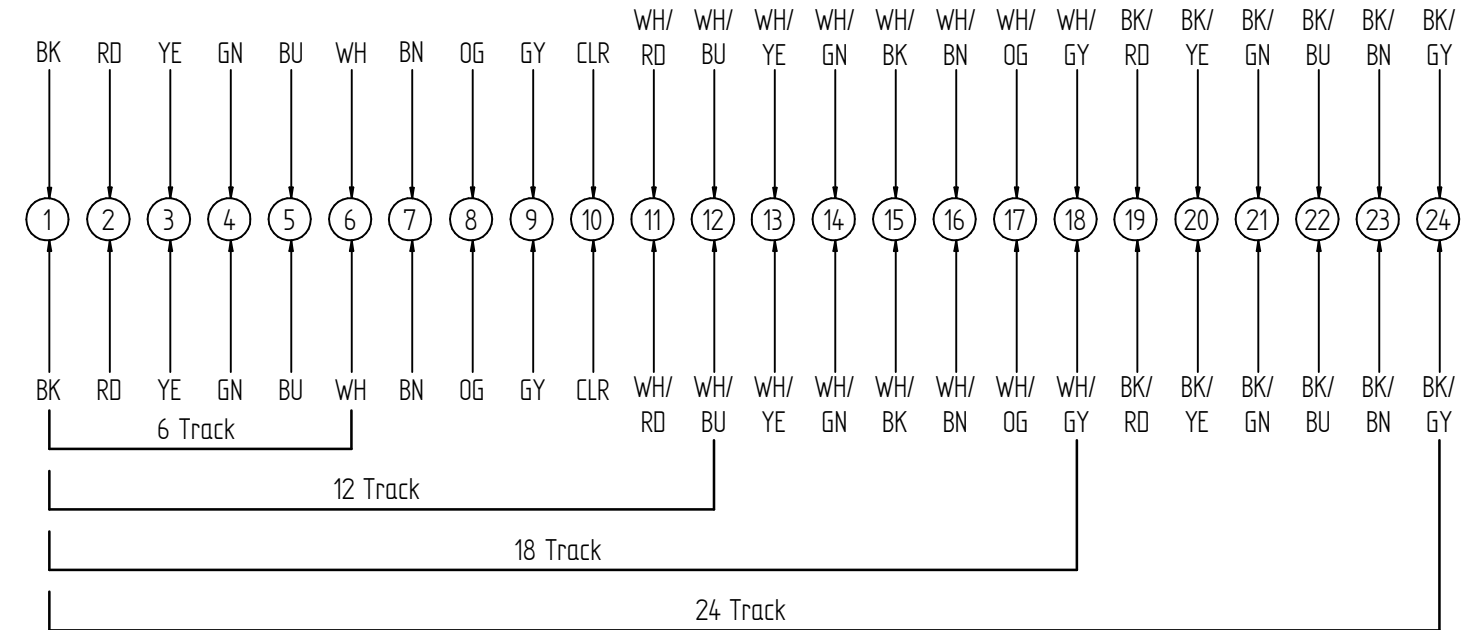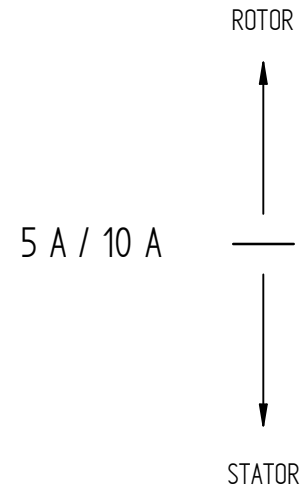

DIN ISO 5456-2 	TOLERANCES ISO 2768 - mH	DIN ISO 13715 +0,3 -0,1 +0,1 -0,3 	FINISH	SCALE 1:1	REFERENCE 2
STANDARDS ISO 8015 ISO 14405	DWG NO 7KC000032	REVISION A1	MATERIAL	WEIGHT 0,001 kg	REFERENCE 1
	Beschreibung Maverick Schleifring 12-Weg 10A DESCRIPTION Maverick Slip Ring 12-Track 10A SIZE/DIM.	CHANGE NO 200120151	FIRST RELEASE 22.12.2021	DESIGNER CREITER 18.11.2022	APPROVED AGREPPMAYR 21.11.2022
Draft: 1000954681/D02/000/03			Modell: 1000954681/D00/000/03		A3