


All parts and components shown in this document are originally created and developed at Schleifring GmbH Germany and a derivative of a civil application. Any customization has no impact on origin and export classification.

All drawings are the property of Schleifring GmbH/ Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

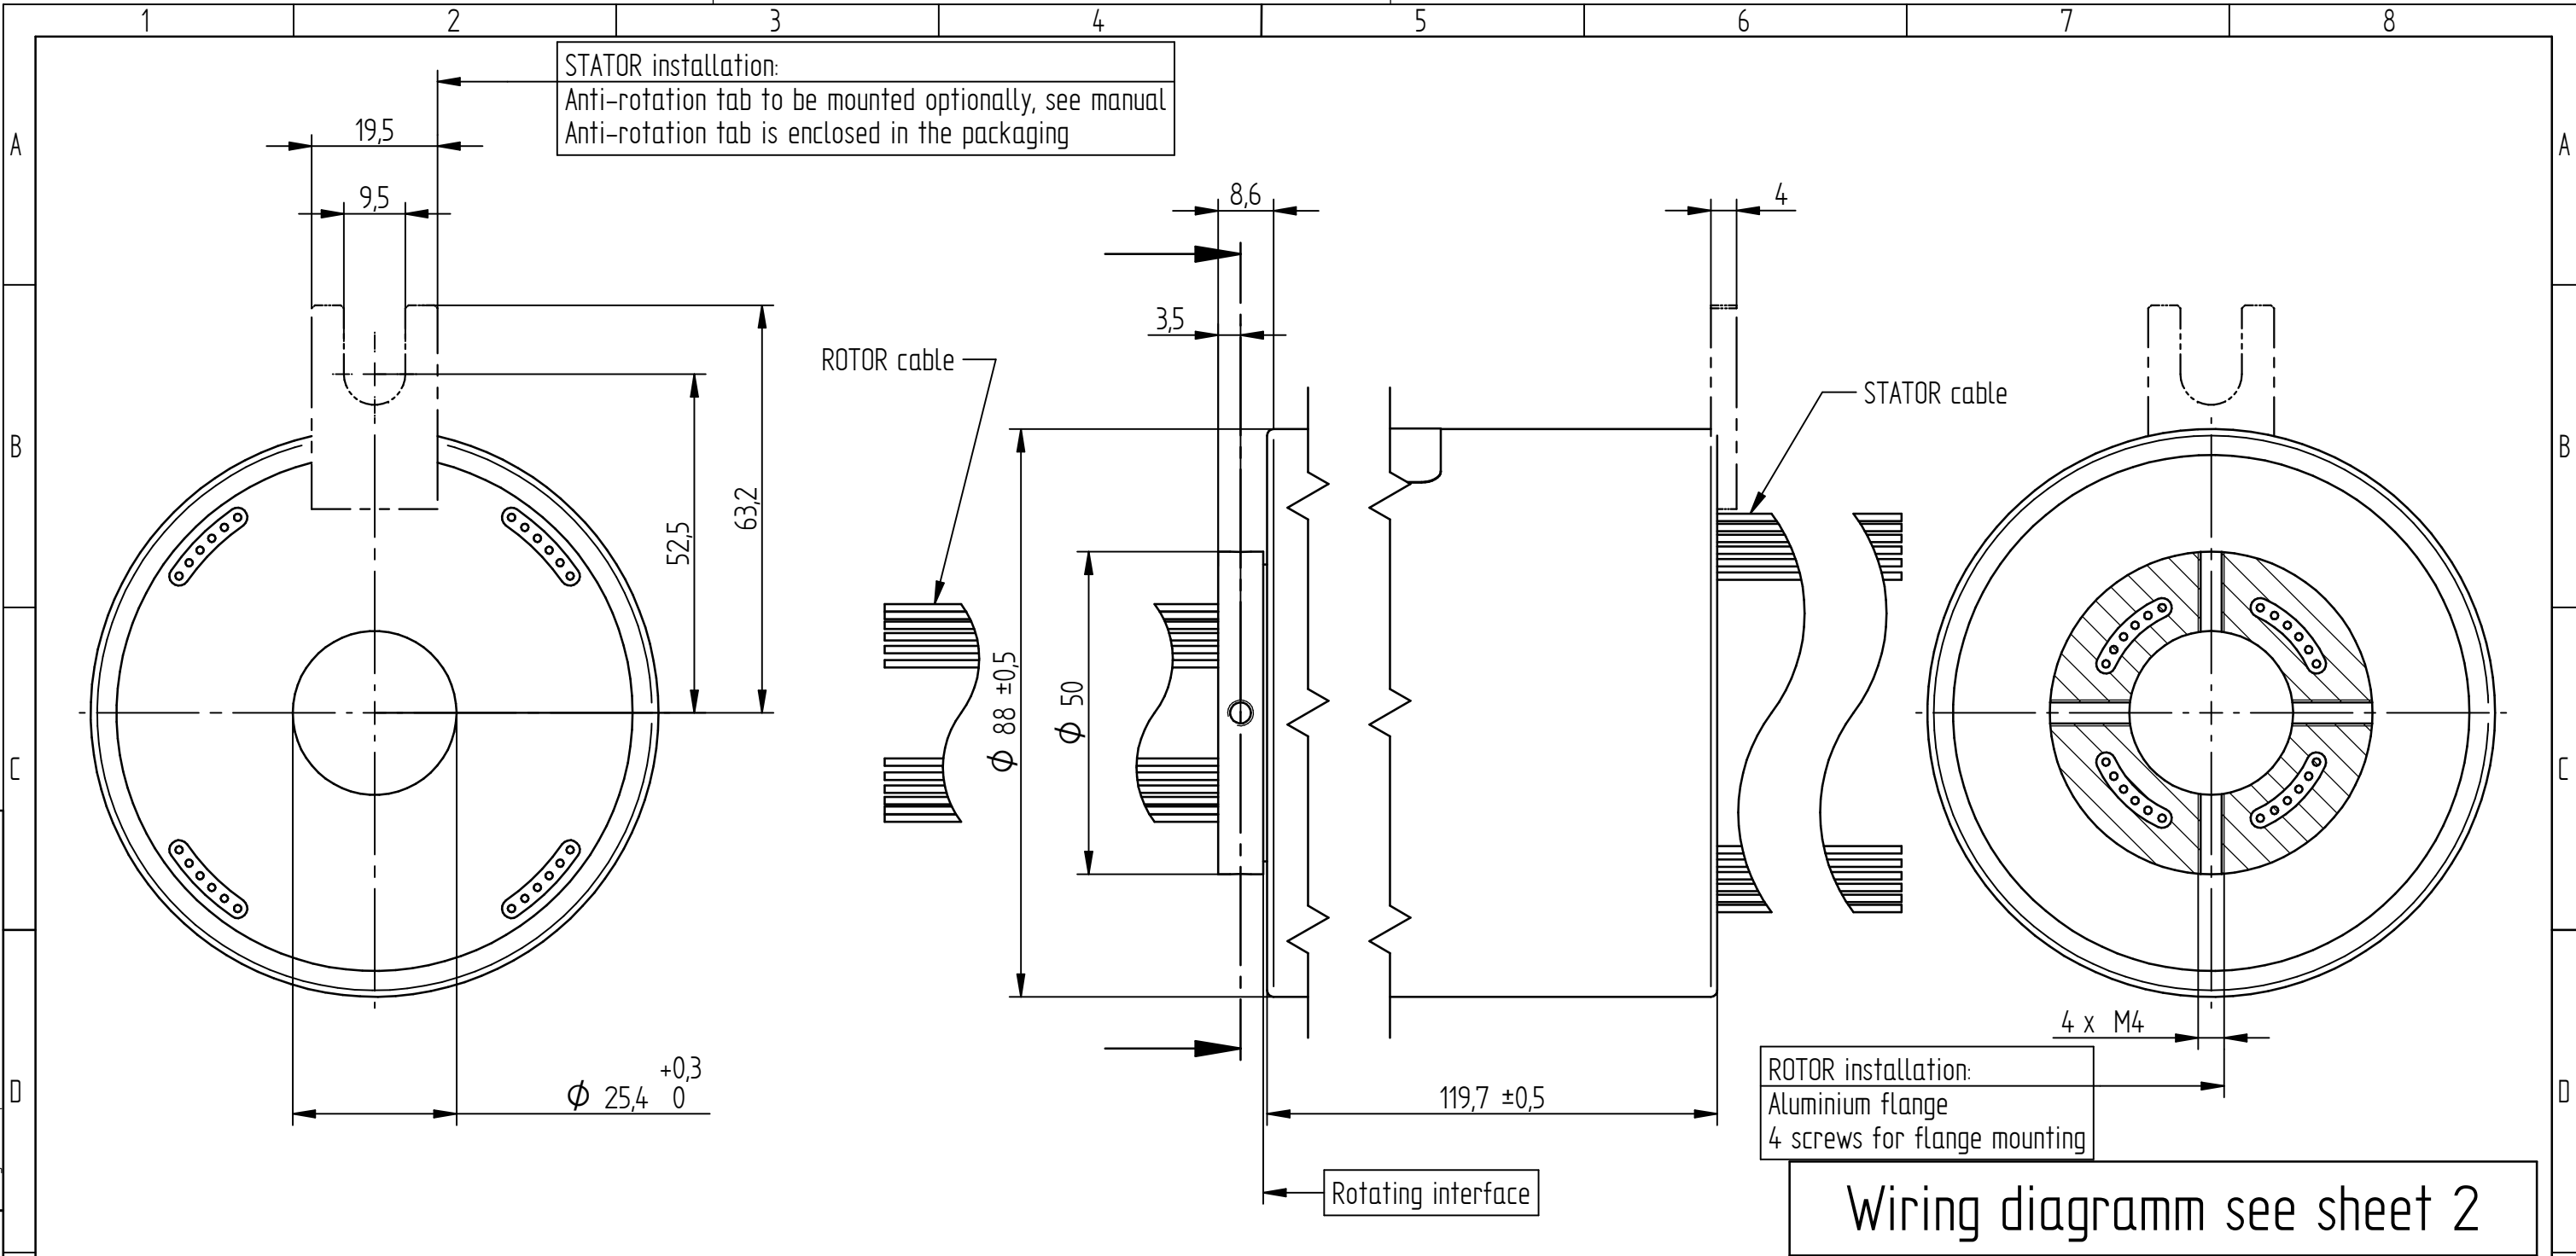

ELECTRONIC & ELECTRIC		MECHANICAL	
Rating Voltage	250 V AC / DC or 400 V AC	Working Speed	300 rpm max.
		Inner Diameter	Ø 25,4
		Contact Material	Precious Metals
Current	10 A	Lead Wire Length	STATOR: 250 mm ROTOR: 250 mm
Track	24	/	/
Insulation Resistance	500 MΩ @ 500 V DC	/	/
ENVIRONMENT		REMARKS	
Working Temperature	-20 °C to +60 °C	Application	see Manual
Working Humidity	≤ 60 % RH	Other	/
Protection Class	IP50	Note:	/

Die Montageanleitung 7BC000000 wird elektronisch bereitgestellt.
The assembly instruction 7BC000000 is provided in electronic format.

10	1	70C000036	Maverick Schleifring 24-Weg 10A		
Pos.	Anz.	Mat.Nr.	Kurztext	Größe/Abmessung	Werkstoff
1	2	3	4	5	6
DIN ISO 5456-2		TOLERANCES		DIN ISO 13715	
ISO 2768 - mH		+0,3 -0,1 +0,1 -0,3		FINISH	
				MATERIAL	
STANDARDS		DWG NO		REVISION	
ISO 8015 ISO 14405		7KC000036		A1	
				FIRST RELEASE	
				15.12.2021	
				DESIGNER	
				CREITER	
				18.11.2022	
				APPROVED	
				AGREPPMAYR	
				21.11.2022	
				CHANGE NO	
				200120151	
				DOCUMENT TYPE	
				Kundenzeichnung	
				SHEET	
				1/2	







SCHLEIFRING

Beschreibung Maverick Schleifring 24-Weg 10A
DESCRIPTION Maverick Slip Ring 24-Track 10A
SIZE/DIM.

All drawings are the property of Schleifring GmbH/ Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

All parts and components shown in this document are originally created and developed at Schleifring GmbH Germany and a derivative of a civil application. Any customization has no impact on origin and export classification.

Cable Table	
Current	Cable
5 A / Signal	AWG17
10 A	
15 A	AWG14

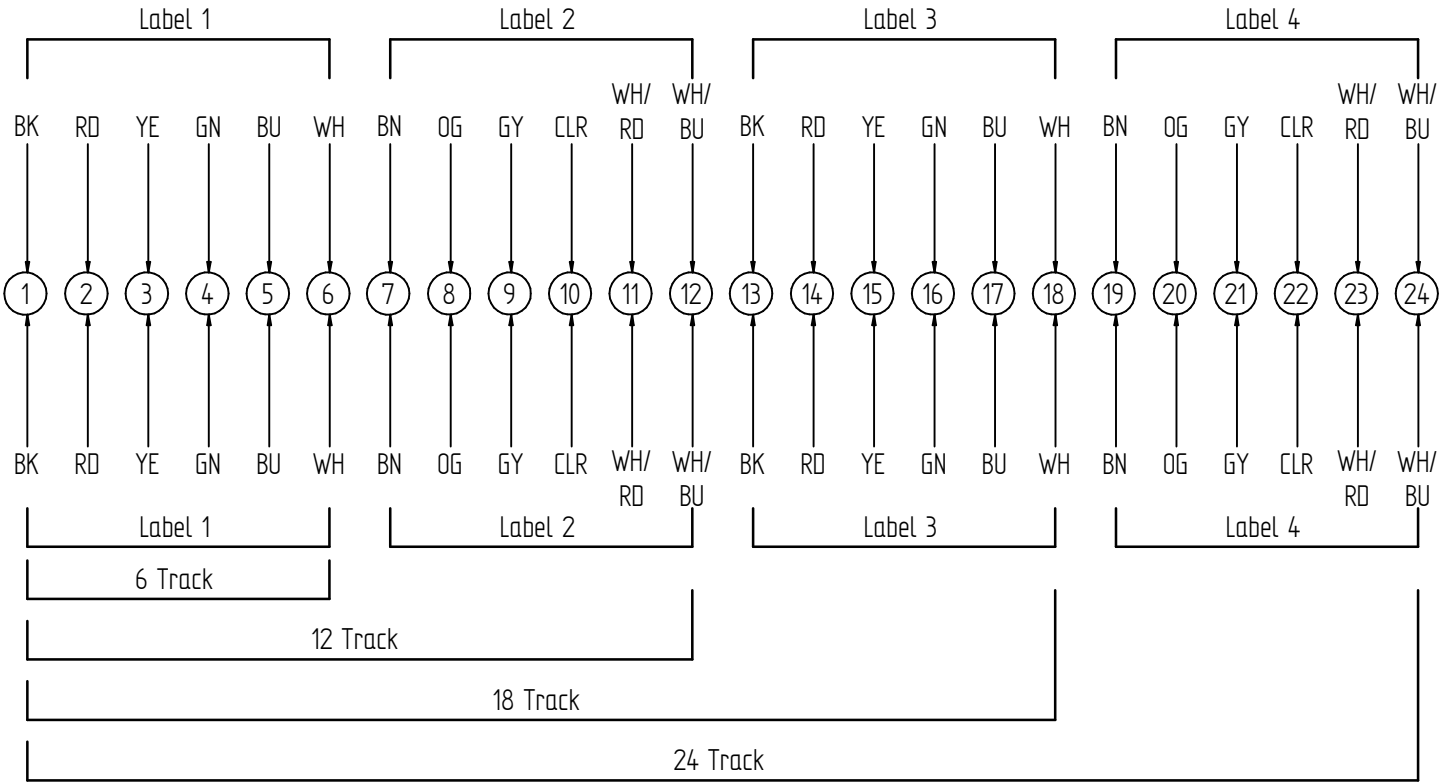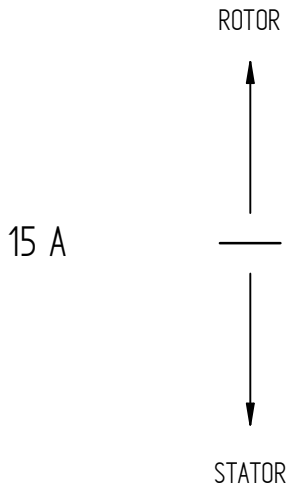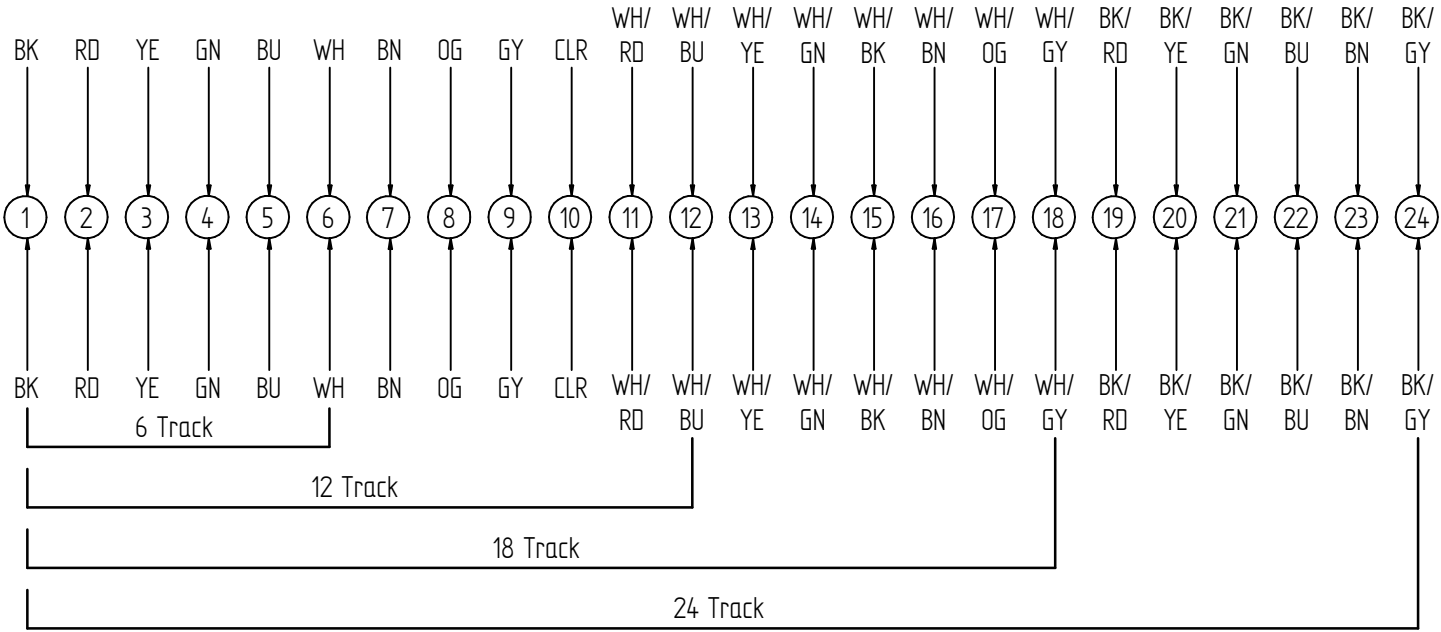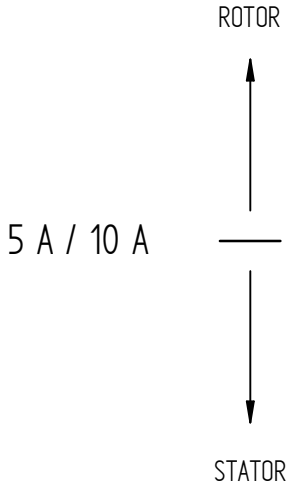

DIN ISO 5456-2 		TOLERANCES ISO 2768 - mH		DIN ISO 13715 +0,3 +0,1 -0,1 -0,3		FINISH		SCALE 1:1		REFERENCE 2			
						MATERIAL		WEIGHT 0,001 kg		REFERENCE 1			
STANDARDS ISO 8015 ISO 14405		DWG NO 7KLC000036				REVISION A1		FIRST RELEASE		15.12.2021			
								DESIGNER		CREITER		18.11.2022	
								APPROVED		AGREPPMAYR		21.11.2022	
 SCHLEIFRING		Beschreibung Maverick Schleifring 24-Weg 10A DESCRIPTION Maverick Slip Ring 24-Track 10A SIZE/DIM.						CHANGE NO 200120151					
								DOCUMENT TYPE Kundenzeichnung				SHEET 2/2	

Draft: 1000954339/002/000/03

Modell: 1000954339/000/000/03

A3