
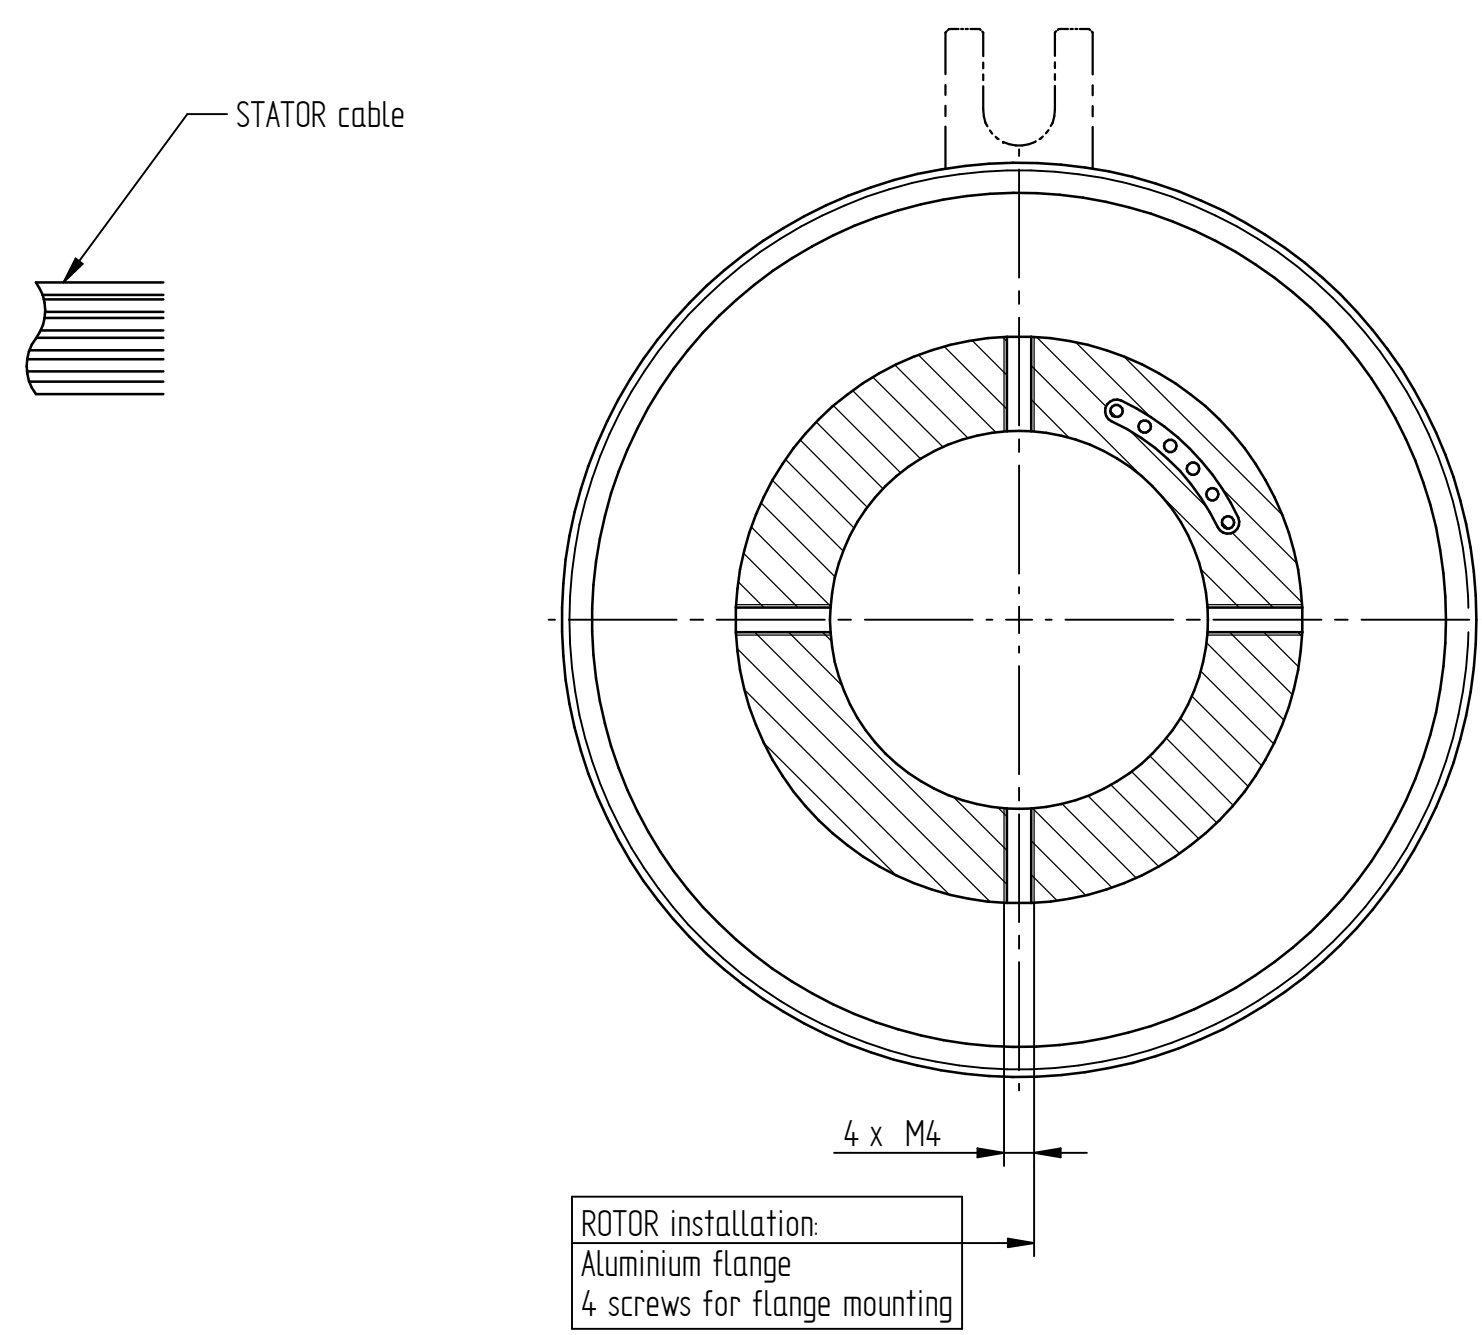


STATOR installation:  
Anti-rotation tab to be mounted optionally, see manual  
Anti-rotation tab is enclosed in the packaging

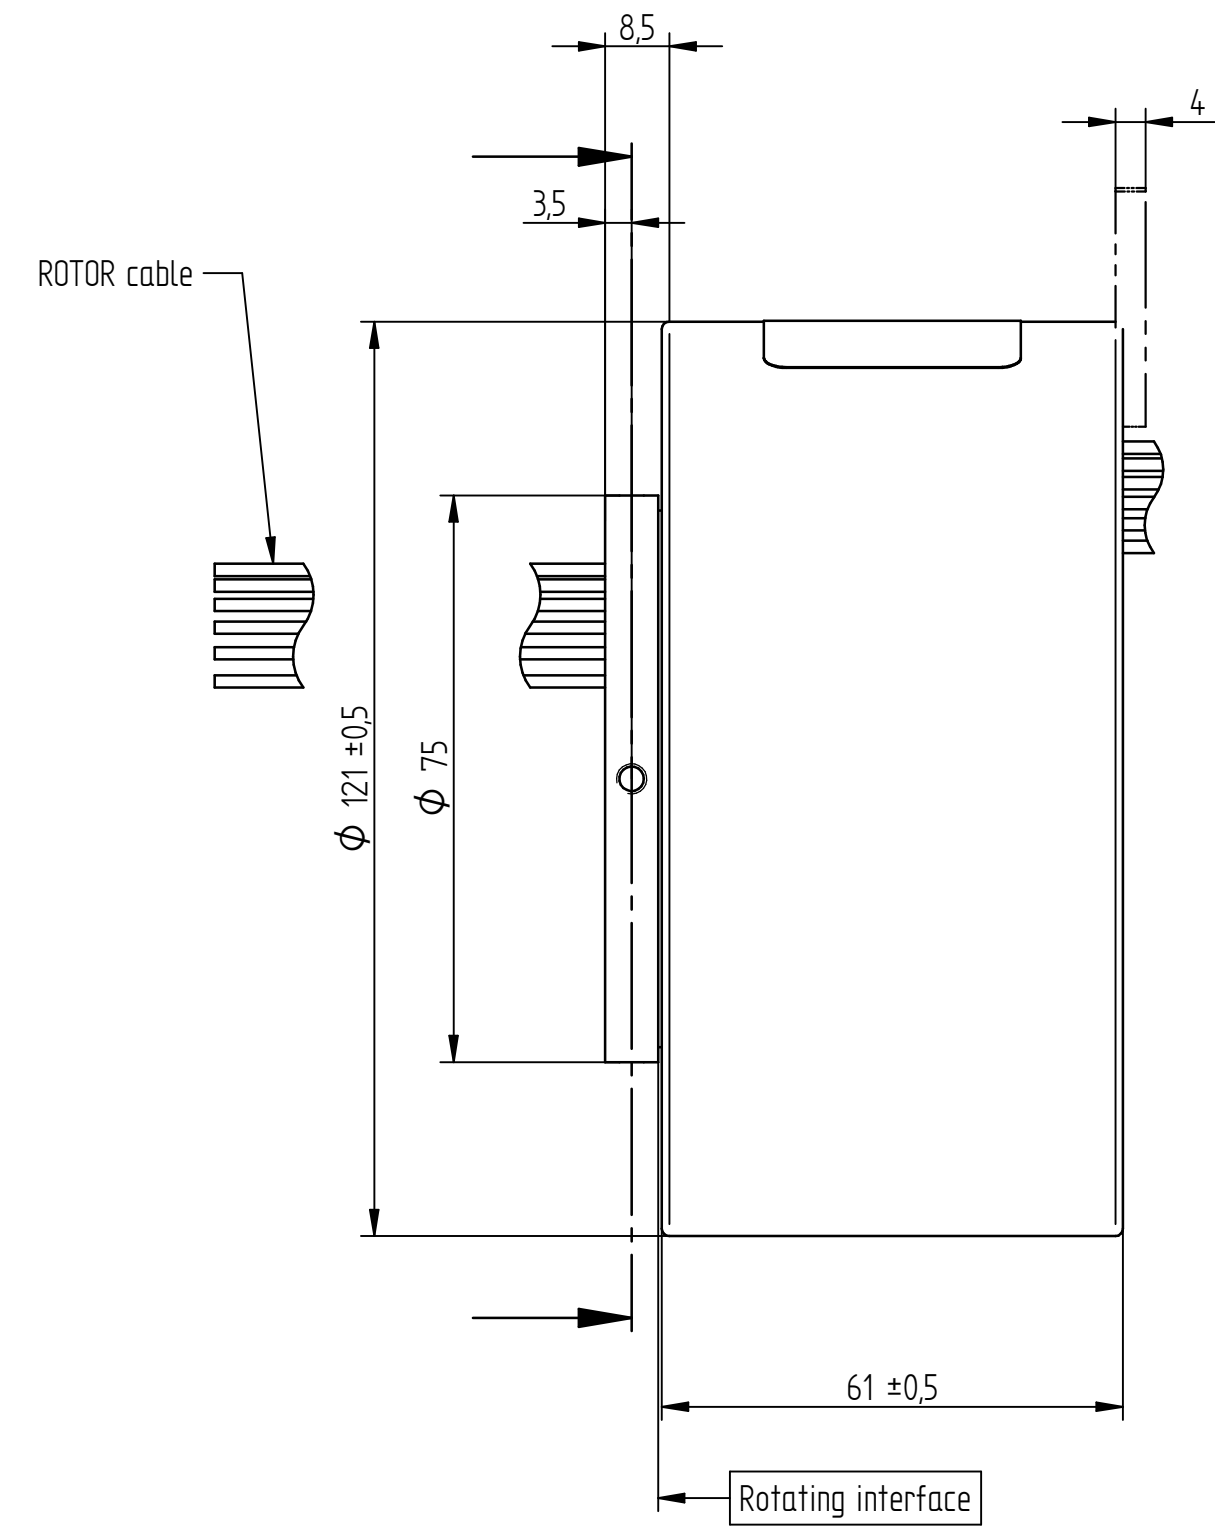

ROTOR installation:  
Aluminium flange  
4 screws for flange mounting

Wiring diagramm see sheet 2

Die Montageanleitung 7BC000000 wird elektronisch bereitgestellt.  
The assembly instruction 7BC000000 is provided in electronic format.





ELECTRONIC & ELECTRIC		MECHANICAL	
Rating Voltage	250 V AC / DC or 400 V AC	Working Speed	300 rpm max.
Current	15 A	Inner Diameter	$\phi 50,0$
		Contact Material	Precious Metals
Track	6	Lead Wire Length	STATOR: 250 mm ROTOR: 250 mm
Insulation Resistance	500 M $\Omega$ @ 500 V DC		
ENVIRONMENT		REMARKS	
Working Temperature	-20 °C to +60 °C	Application	see Manual
Working Humidity	$\leq 60\%$ RH	Other	/
Protection Class	IP50	Note:	/

10	1	70C000025	Maverick Schleifring 6-Weg 15A		
Pos.	Anz.	Mat.Nr.	Kurztext	GroÙe/Abmessung	Werkstoff
1	2	3	4	5	6
DIN ISO 5456-2	TOLERANCES	DIN ISO 13715	FINISH	SCALE	REFERENCE 2
	ISO 2768 - mH	+0,3 +0,1	-0,1 -0,3	1:1	WEIGHT 0,001 kg
STANDARDS ISO 8015 ISO 14405	DWG NO	70C000025	REVISION	FIRST RELEASE	18.01.2022
	SCHLEIFRING	Beschreibung Maverick Schleifring 6-Weg 15A DESCRIPTION Maverick Slip Ring 6-Track 15A	A1	DESIGNER CREITER	21.11.2022
				APPROVED AGREPPMAYR	21.11.2022
				CHANGE NO 200120151	
				DOCUMENT TYPE Kundenzeichnung	SHEET 1/2
Draft: 1000955700/D02/000/02				Modell: 1000955700/D00/000/02	

All drawings are the property of Schleifring GmbH Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent utility model or design.

All drawings are the property of Schleifring GmbH/ Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Cable Table	
Current	Cable
5 A / Signal	AWG17
10 A	
15 A	AWG14

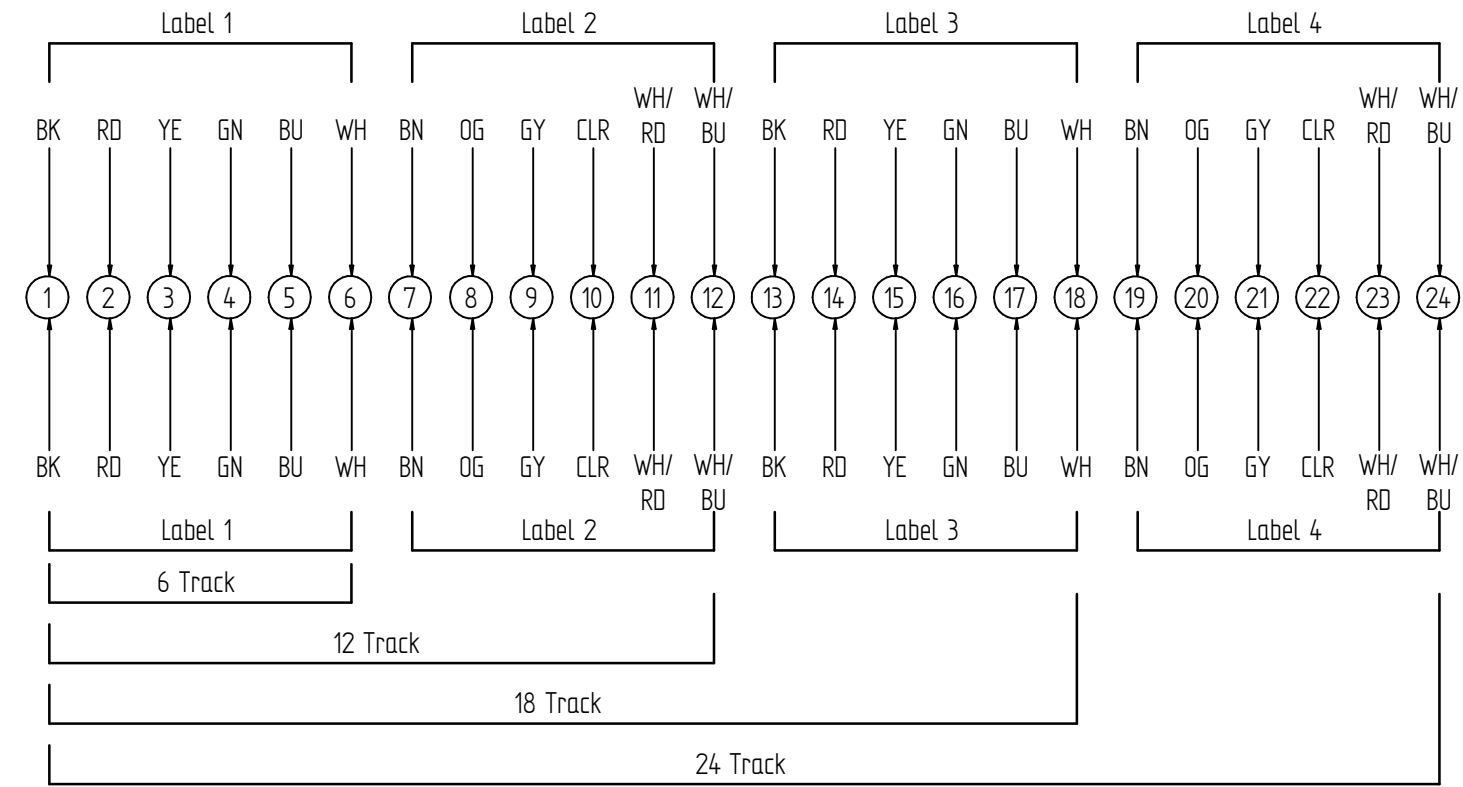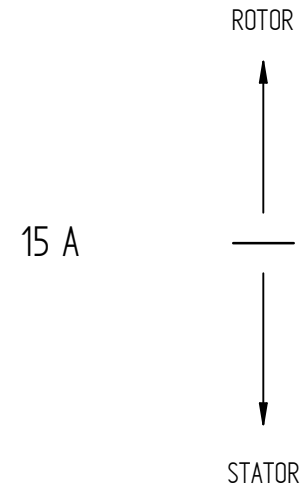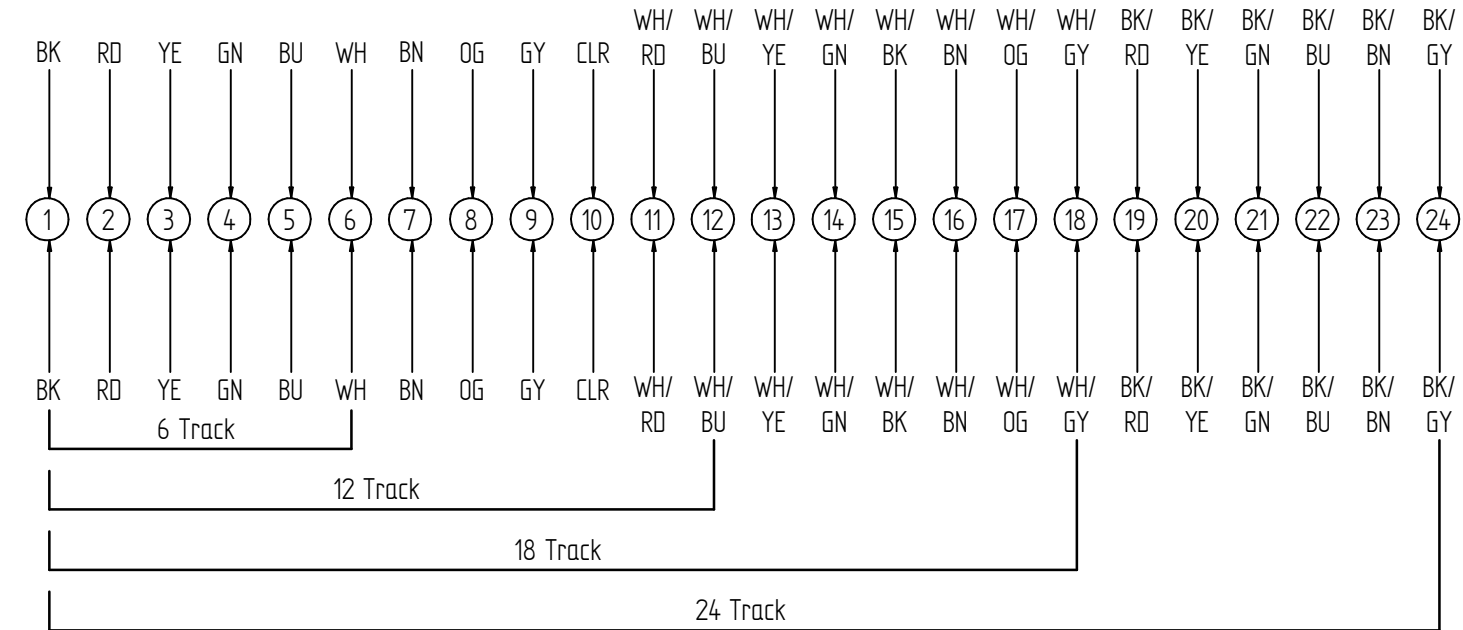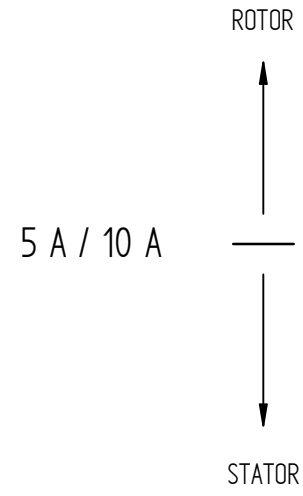

DIN ISO 5456-2 	TOLERANCES ISO 2768 - mH	DIN ISO 13715 	FINISH	SCALE 1:1	REFERENCE 2
		$+0,3$ $+0,1$	$-0,1$ $-0,3$	MATERIAL	WEIGHT 0,001 kg
STANDARDS ISO 8015 ISO 14405		DWG NO <b>7KC000025</b>		REVISION <b>A1</b>	FIRST RELEASE 18.01.2022
		Beschreibung <b>Maverick Schleifring 6-Weg 15A</b> DESCRIPTION <b>Maverick Slip Ring 6-Track 15A</b>		DESIGNER CREITER	21.11.2022
				APPROVED AGREPPMAYR	21.11.2022
		SIZE/DIM.		CHANGE NO 200120151	SHEET 2/2