


All drawings are the property of Schleifring GmbH/ Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

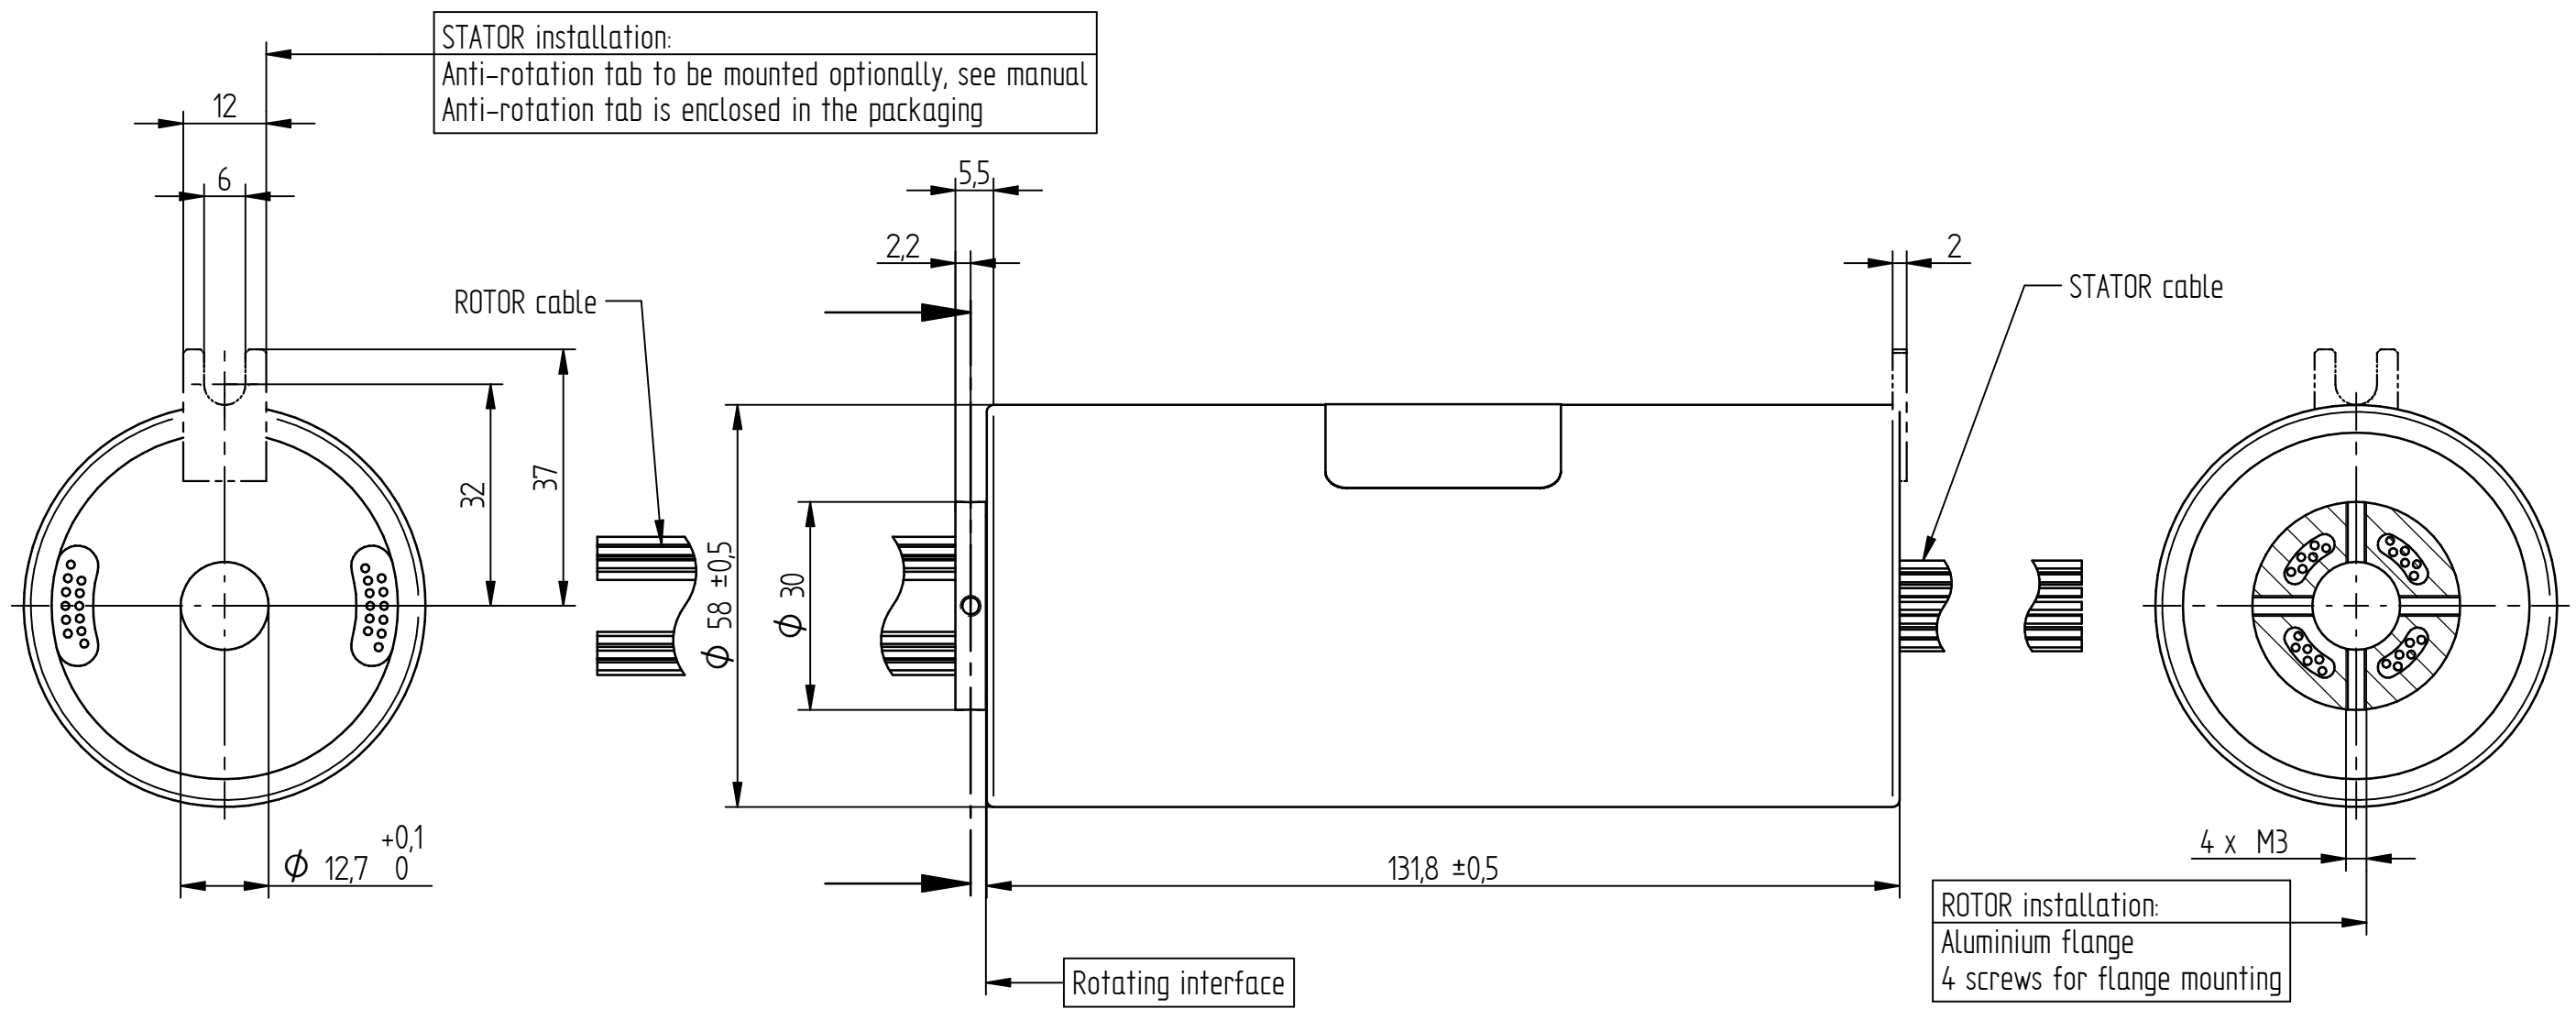

Wiring diagramm see sheet 2





Die Montageanleitung 7BC000000 wird elektronisch bereitgestellt.
 The assembly instruction 7BC000000 is provided in electronic format.

ELECTRONIC & ELECTRIC		MECHANICAL	
Rating Voltage	250 V AC / DC or 400 V AC	Working Speed	300 rpm max.
		Inner Diameter	Ø 12,7
		Contact Material	Precious Metals
Current	10 A	Lead Wire Length	STATOR: 250 mm ROTOR: 250 mm
Track	24	/	/
Insulation Resistance	500 MΩ @ 500 V DC	/	/
ENVIRONMENT		REMARKS	
Working Temperature	-20 °C to +60 °C	Application	see Manual
Working Humidity	≤ 60 % RH	Other	/
Protection Class	IP50	Note:	/

10	1	70C000043	Maverick Schleifring 24-Weg 10A		
Pos.	Anz.	Mat.Nr.	Kurztext	Größe/Abmessung	Werkstoff
1	2	3	4	5	6
DIN ISO 5456-2		TOLERANCES		DIN ISO 13715	
		ISO 2768 - mH		+0,3 -0,1 +0,1 -0,3	
				FINISH	
STANDARDS		DWG NO		REVISION	
ISO 8015 ISO 14405		7KC000043		A1	
		Beschreibung Maverick Schleifring 24-Weg 10A DESCRIPTION Maverick Slip Ring 24-Track 10A SIZE/DIM.		FIRST RELEASE	
				09.12.2021	
		APPROVED AGREPPMAYR		DESIGNER	
				CREITER	
		CHANGE NO 200120151		APPROVED	
				21.11.2022	
				DOCUMENT TYPE	
				Kundenzeichnung	
				SHEET	
				1/2	

All drawings are the property of Schleifring GmbH/ Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Cable Table	
Current	Cable
5 A / Signal	AWG17
10 A	
15 A	AWG14

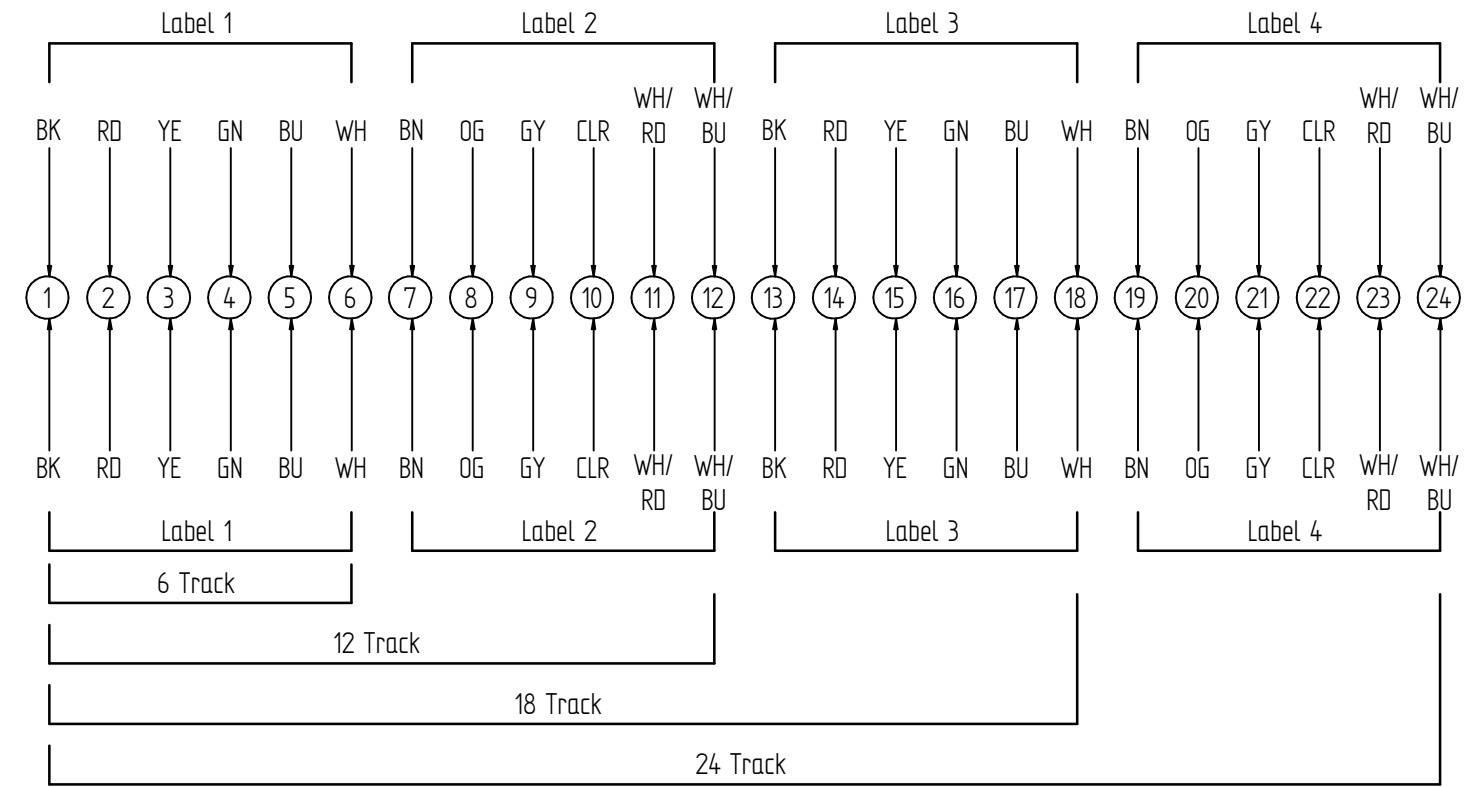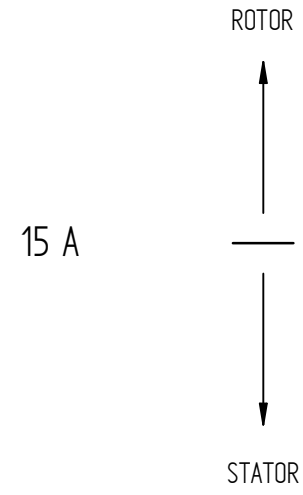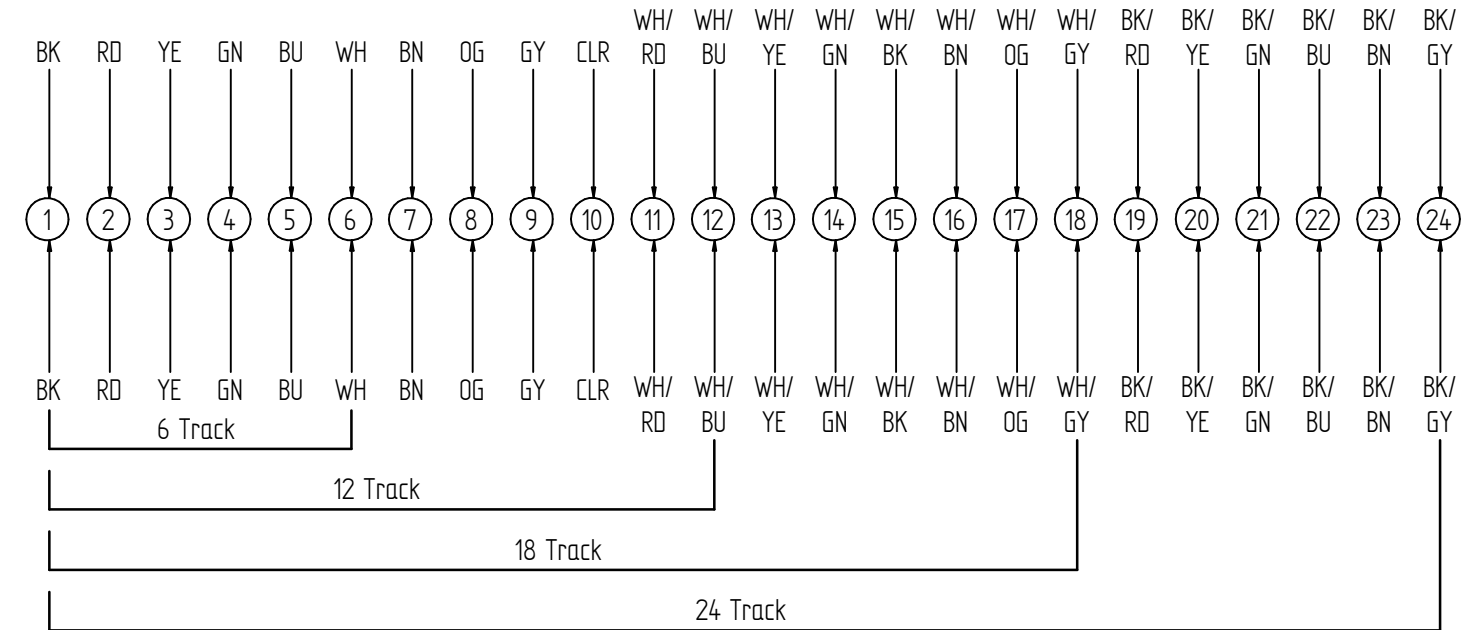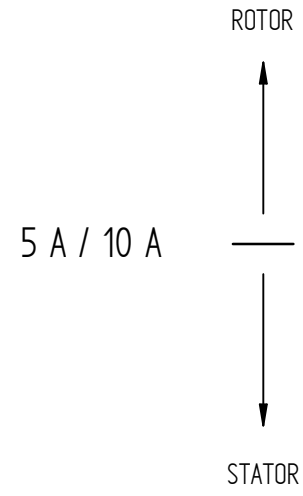

DIN ISO 5456-2 	TOLERANCES ISO 2768 - mH	DIN ISO 13715 +0,3 +0,1 -0,1 -0,3	FINISH	SCALE 1:1	REFERENCE 2
STANDARDS ISO 8015 ISO 14405			MATERIAL	WEIGHT 0,001 kg	REFERENCE 1
DWG NO 7KLC000043		REVISION A1	FIRST RELEASE 09.12.2021		
		DESIGNER CREITER		18.11.2022	
		APPROVED AGREPPMAYR		21.11.2022	
Beschreibung Maverick Schleifring 24-Weg 10A DESCRIPTION Maverick Slip Ring 24-Track 10A			CHANGE NO 200120151		
SIZE/DIM.			DOCUMENT TYPE Kundenzeichnung		SHEET 2/2